


eArc

SMB360F-6X20DW

360 Watt

120 Half Cell Monocrystalline Module

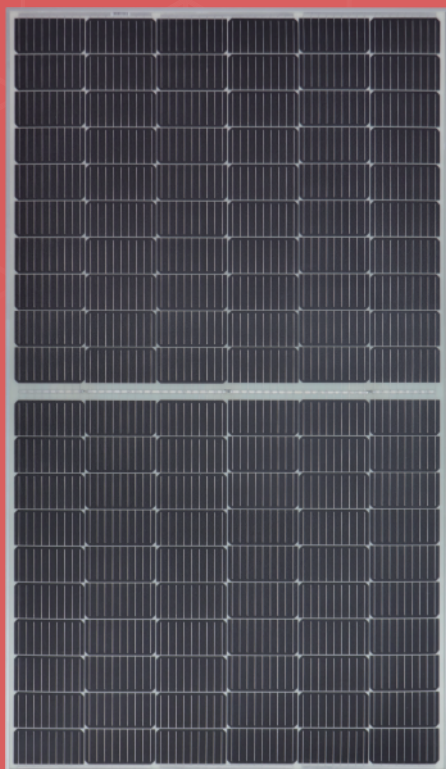

Ultra-light: Glass free module weighs 9.6 kg, 60% lighter than conventional glass modules.



Fast-Installation: Through "Quick-Bonding" installation, eArc requires no penetration, reduces time on roof by 40% and eliminates the use of mounting hardware.



No Light Pollution: Glass-free design significantly reduces light pollution.



Durable: eArc is the first glassless module to pass the same durability tests as conventional glass modules, including IEC 61215:2016, IEC61730:2016.

POWER OUTPUT RANGE 355~360 W

POWER TOLERANCE 0-5 W

MADE IN CHINA

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty


25 Year Linear Power Warranty




www.sunman-energy.com

CAUTION: Read installation manual before using the product.


©2021 Sunman (zhenjiang) Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

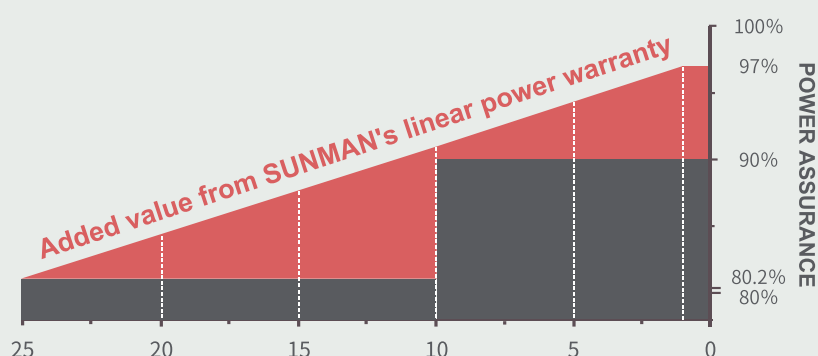

DIMENSIONS

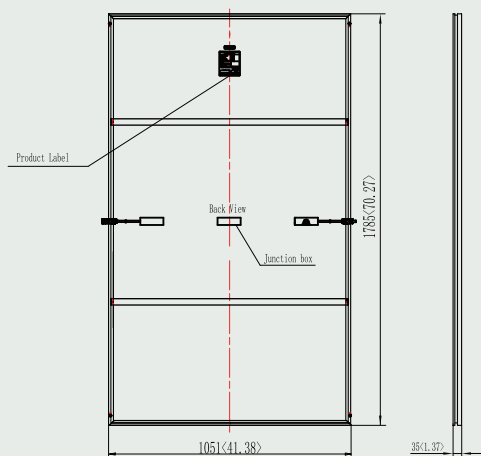

I-V CURVE (360)

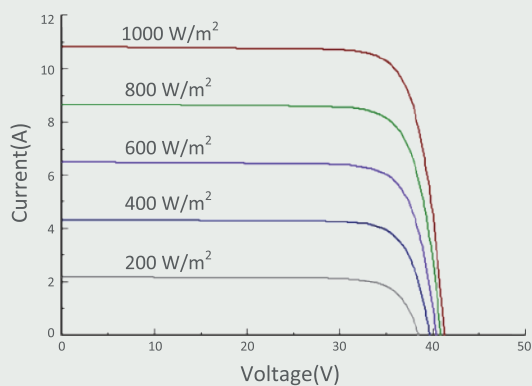

TEMPERATURE CHARACTERISTICS

Nominal Module Operating Temperature(NOMT) **41±2 °C**

Temperature Coefficient of P_{max} **-0.38 %/°C**

Temperature Coefficient of V_{oc} **-0.28 %/°C**

Temperature Coefficient of I_{sc} **0.020 %/°C**



SMBDW IEC AU 2021A

ELECTRICAL CHARACTERISTICS

STC	SMB355F-6X20DW	SMB360F-6X20DW
Maximum Power (P _{max})	355	360
Maximum Power Voltage (V _{mp})	34.7	34.9
Maximum Power Current (I _{mp})	10.24	10.32
Open-circuit Voltage (V _{oc})	41.1	41.3
Short-circuit Current (I _{sc})	10.72	10.82
Module Efficiency (%)	18.9	19.2
Operating Temperature	-40 °C to 85 °C	
Maximum System Voltage	1000 V DC (IEC)	
Maximum Series Fuse Rating	20 A	
Application Class	Class A	
Power Tolerance	0/+5 W	
STC: Irradiance 1000W/m ² , Cell temperature 25 °C, AM=1.5.		
Tolerances of P _{max} , V _{oc} and I _{sc} are within ±5%		

NMOT	SMB355F-6X20DW	SMB360F-6X20DW
Maximum Power (P_{max})	268.4	272.2
Maximum Power Voltage (V_{mp})	32.0	32.2
Maximum Power Current (I_{mp})	8.39	8.46
Open-circuit Voltage (V_{oc})	38.6	38.8
Short-circuit Current (I_{sc})	8.69	8.77
NMOT: Irradiance 800W/m ² , Ambient temperature 20 °C, AM=1.5, Wind speed 1 m/s.		

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline silicon(166mm half cell)
No. of Cells	120 (6×20)
Module Dimensions	1785×1051×35 mm
Weight	9.6kg
Backsheet	White
Frame	Anodized Aluminium Alloy
J-box	IP 68 rated
Output Cables	Photovoltaic technology cable 4.0 mm 2, (+)150 / (-)450 mm
Connector	Dawning: C1 

PACKAGING CONFIGURATION


	20' GP	40' HC
Module per pallet	30+20	30
Pieces per container	300	720

eArc

SMB430F-6X24DW

430 Watt

144 Half Cell Monocrystalline Module

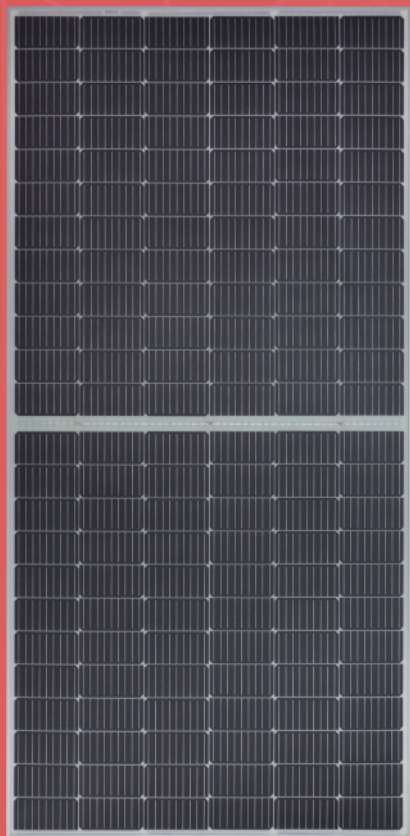

Ultra-light: Glass free module weighs 11.2 kg, 60% lighter than conventional glass modules.



Fast-Installation: Through "Quick-Bonding" installation, eArc requires no penetration, reduces time on roof by 40% and eliminates the use of mounting hardware.



No Light Pollution: Glass-free design significantly reduces light pollution.



Durable: eArc is the first glassless module to pass the same durability tests as conventional glass modules, including IEC 61215:2016, IEC61730:2016.

POWER OUTPUT RANGE 425~430 W

POWER TOLERANCE 0-5 W

MADE IN CHINA

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty


25 Year Linear Power Warranty




www.sunman-energy.com

CAUTION: Read installation manual before using the product.


©2021 Sunman (zhenjiang) Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

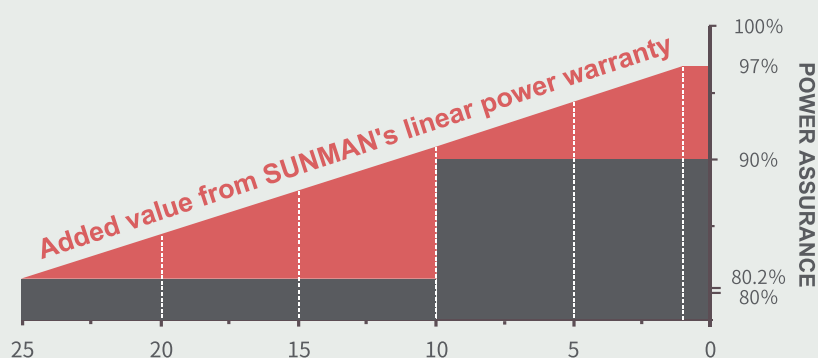

DIMENSIONS

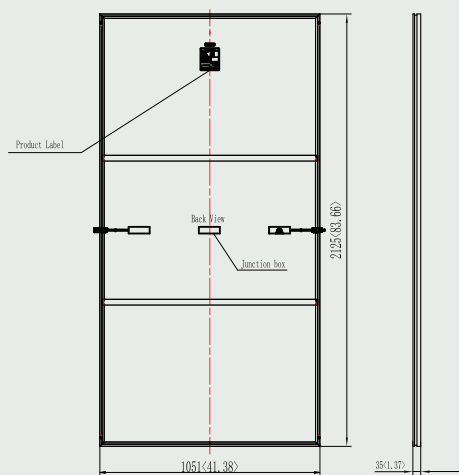

I-V CURVE (430)

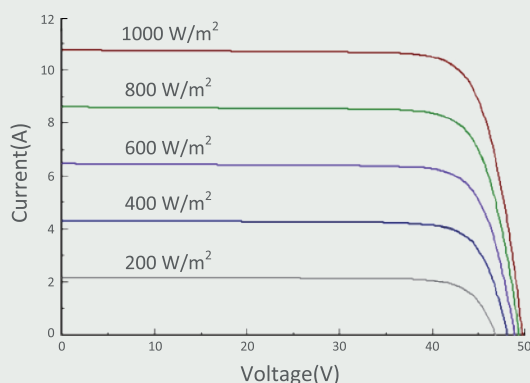

TEMPERATURE CHARACTERISTICS

Nominal Module Operating Temperature(NOMT) **41±2 °C**

Temperature Coefficient of P_{max} **-0.38 %/°C**

Temperature Coefficient of V_{oc} **-0.28 %/°C**

Temperature Coefficient of I_{sc} **0.020 %/°C**



Fire resistance:
C in accordance with UL 790

SMBDW IEC AU 2021A

ELECTRICAL CHARACTERISTICS

STC	SMB425F-6X24DW	SMB430F-6X24DW
Maximum Power (P _{max})	425	430
Maximum Power Voltage (V _{mp})	41.8	42.0
Maximum Power Current (I _{mp})	10.17	10.24
Open-circuit Voltage (V _{oc})	49.6	49.8
Short-circuit Current (I _{sc})	10.67	10.74
Module Efficiency (%)	19.0	19.3
Operating Temperature	-40 °C to 85 °C	
Maximum System Voltage	1000 V DC (IEC)	
Maximum Series Fuse Rating	20 A	
Application Class	Class A	
Power Tolerance	0/+5 W	
STC: Irradiance 1000W/m² , Cell temperature 25 °C , AM=1.5.		
Tolerances of P _{max} , V _{oc} and I _{sc} are within ±5%		

NMOT	SMB425F-6X24DW	SMB430F-6X24DW
Maximum Power (P_{max})	321.4	325.1
Maximum Power Voltage (V_{mp})	38.6	38.8
Maximum Power Current (I_{mp})	8.33	8.38
Open-circuit Voltage (V_{oc})	46.6	46.8
Short-circuit Current (I_{sc})	8.64	8.69
NMOT: Irradiance 800W/m², Ambient temperature 20 °C, AM=1.5, Wind speed 1 m/s.		

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline silicon(166mm half cell)
No. of Cells	144 (6×24)
Module Dimensions	2125×1051×35 mm
Weight	11.2kg
Backsheet	White
Frame	Anodized Aluminium Alloy
J-box	IP 68 rated
Output Cables	Photovoltaic technology cable 4.0 mm 2, (+)150 / (-)450 mm
Connector	Dawning: C1 

PACKAGING CONFIGURATION

	20' GP	40' HC
Module per pallet	30+20	30
Pieces per container	250	660